


# DSP300-318

Digital Signage Player with Intel Atom® Processor x5-E3950, Pentium® Processor N4200 or Celeron® Processor N3350/J3455, DisplayPort++, HDMI, 2 GbE LAN, and 4 USB

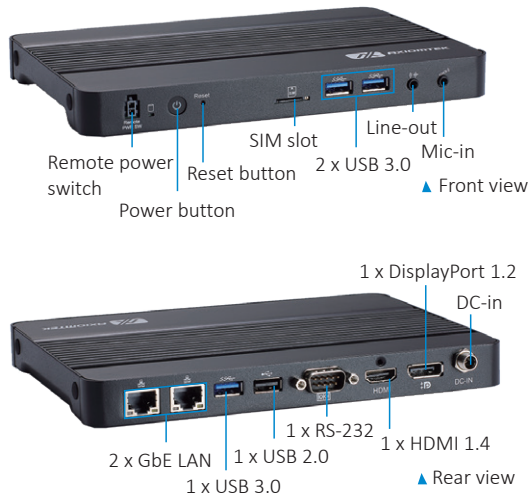

## Features

- Fanless operation with low power consumption
- 2 DDR3L-1600 SO-DIMM for up to 8GB of memory
- 1 HDMI 1.4 and 1 DisplayPort 1.2
- 4 USB and 2 GbE LAN
- Supports 1 M.2 Key E 2230 slot for Wi-Fi/Bluetooth
- Supports 1 M.2 Key B 3042 slot for 4G LTE
- 1 M.2 Key M 2280 slot for storage



## Specifications

CPU	Intel Atom® x5-E3950 2.0GHz, Pentium® N4200 2.5GHz, Celeron® N3350 2.4GHz or Celeron® J3455 2.3GHz onboard
Chipset	SoC integrated
System Memory	2 x DDR3L-1600 SO-DIMM, up to 8GB
Storage	1 x M.2 Key M 2280 slot
TPM	N/A
Watchdog Timer	255 levels, 1 to 255 sec./min.
I/O	3 x USB 3.0 1 x USB 2.0 2 x 10/100/1000 Mbps Ethernet 1 x HDMI 1.4 1 x DisplayPort 1.2 1 x DB9 RS-232 1 x Line-out 1 x Mic-in 1 x SIM card 1 x Power switch 1 x Reset switch 1 x Remote switch 1 x Screw type VDC power input connector 4 x Antenna opening
Expansion Interface	1 x M.2 Key E 2230 slot for Wi-Fi/Bluetooth 1 x M.2 Key B 3042 slot for 4G LTE 1 x SIM card slot
Battery Lithium	Lithium 3 V/220 mAh
System Indicator	1 x White LED for HDD active
Power Input	+12V DC-in
Dimensions	200 mm (7.87") (W) x 137.8 mm (5.4") (D) x 20 mm (0.79") (H)
Weight (net/gross)	0.90 kg (1.98 lb)/1.57 kg (3.45 lb)
Operating Temperature	0°C to +50°C (+32°F to +122°F) -40°C to +70°C (-40°F to +158°F) for E22K300115 only
Humidity	10%- 90% relative humidity, non-condensing
Certifications	CE, FCC class A
EOS Support	Win 10 IoT, Linux

## Ordering Information


### Standard

DSP300-318-N4200-US (P/N: E22K300104)	Digital signage player with Intel® Pentium® N4200 2.5GHz, DisplayPort++, HDMI, 2 GbE LAN, 4 USB, 12V/36W power adapter, and US power cord
DSP300-318-N3350-US (P/N: E22K300105)	Digital signage player with Intel® Celeron® N3350 2.4GHz, DisplayPort++, HDMI, 2 GbE LAN, 4 USB, 12V/36W power adapter, and US power cord
DSP300-318-N4200-EU (P/N: E22K300106)	Digital signage player with Intel® Pentium® N4200 2.5GHz, DisplayPort++, HDMI, 2 GbE LAN, 4 USB, 12V/36W power adapter, and EU power cord
DSP300-J3455-SEU (P/N: E22K300111)	Digital signage player with Intel® Celeron® J3455 2.3GHz, DisplayPort++, HDMI, 2 GbE LAN, 4 USB, 12V/36W power adapter, and EU power cord
DSP300-N4200-EEU (P/N: E22K300113)	Digital signage player with Intel® Pentium® N4200 2.5GHz, DisplayPort++, HDMI, 2 GbE LAN, 4 USB, 64GB eMMC, 12V/36W power adapter, and EU power cord
DSP300-J3455-EEU (P/N: E22K300114)	Digital signage player with Intel® Celeron® J3455 2.3GHz, DisplayPort++, HDMI, 2 GbE LAN, 4 USB, 64GB eMMC, 12V/36W power adapter, and EU power cord
DSP300-E3950-WUS (P/N: E22K300115)	Digital signage player with Intel Atom® x5-E3950 2.0GHz, DisplayPort++, HDMI, 2 GbE LAN, 4 USB, 12V/36W power adapter, US power cord, and -40°C to +70°C

## Packing List

- 1 x Quick installation guide
- 1 x Adapter 12V 36W
- 1 x Power cord
- 1 x Wall mount bracket
- 4 x Foot pad

## Dimensions

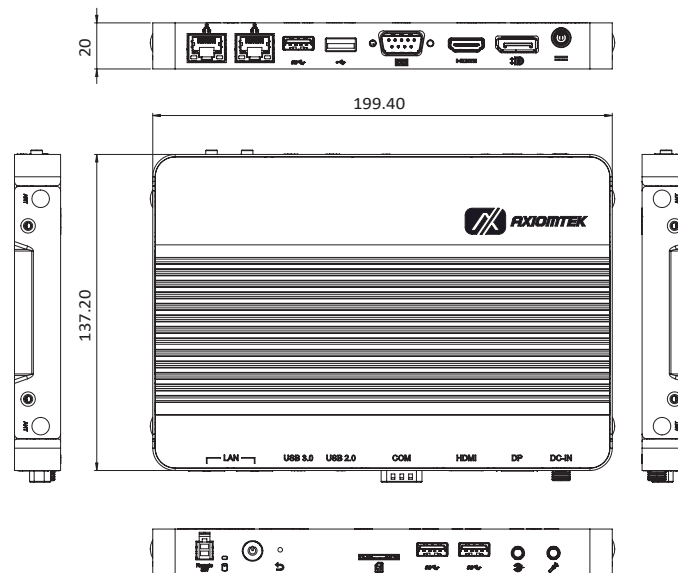



**Delmation**  
products



## Delmation Products

Blauw-roodlaan 300  
2718 SK Zoetermeer  
079 - 342 20 41

[www.delmation.nl](http://www.delmation.nl) | [info@delmation.nl](mailto:info@delmation.nl)