


# DSP501-527

Digital Signage Player with 8th Gen Intel® Core™ i5/i3 or Celeron® Processor, DisplayPort++, HDMI, 5 USB, and GbE LAN

## Features

- 8th gen Intel® Core™ i5/i3 or Celeron® processor
- 2 DDR4-2400 SO-DIMM for up to 32GB of memory
- 1 DisplayPort++ and 1 HDMI 2.0
- 5 USB and 1 GbE LAN
- 1 M.2 Key E 2230 for Wi-Fi/Bluetooth
- 1 M.2 Key B 3042 for 4G LTE


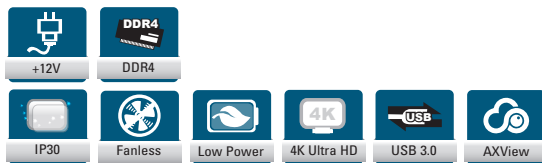


## Specifications

CPU	Intel® Core™ i5-8365UE, i3-8145UE or Celeron® 4305UE processor
System Memory	2 x DDR4-2400 SO-DIMM, up to 32GB
Chipset	N/A
Storage	1 x M.2 Key M 2280 (SATA & NVMe)
TPM	TPM 2.0 (optional)
Watchdog Timer	255 levels, 1 to 255 sec./min.
System I/O Outlet	4 x USB 3.0 1 x USB 2.0 1 x GbE LAN 1 x HDMI 2.0 1 x DisplayPort++ 1 x RS-232 1 x Mic-in 1 x Line-out 1 x DC power input (lockable) 1 x SIM card 1 x HDD LED 1 x Power button 1 x Reset switch 1 x Remote power switch 4 x Antenna opening
Expansion Interface	1 x M.2 Key E 2230 slot for Wi-Fi/Bluetooth 1 x M.2 Key B 3042 slot for 4G LTE 1 x SIM card slot
Battery Lithium	Lithium 3 V/220 mAH
Power Input	+12V DC-in
Dimensions	200 mm (7.8") (W) x 160 mm (6.2") (D) x 26 mm (1.0") (H)
Weight (net/gross)	1.3 kg (2.86 lb)/2.3 kg (5.07 lb)
Operating Temperature	0°C to +50°C (+32°F to +122°F), disabling CPU Turbo boost
Humidity	10% - 90% relative humidity, non-condensing
Certifications	CE, FCC class A
EOS Support	Win 10 IoT, Win 10 Pro, Linux
Software Support	AXView

## Packing List

- 1 x Quick installation guide
- 1 x Adapter 12V 60W
- 1 x Wall mount kit
- 4 x Foot pad

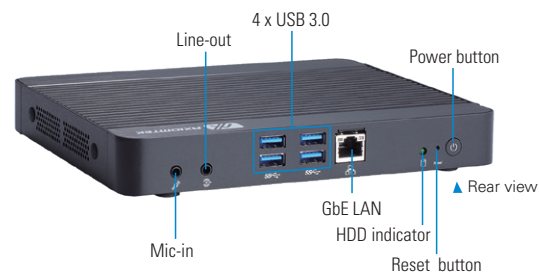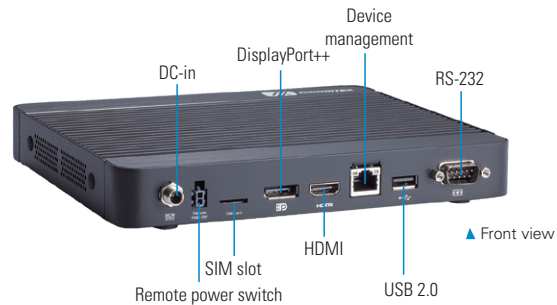


## Ordering Information

Standard	
DSP501-527-i5-8365UE (P/N: E22K501103)	Digital signage player with Intel® Core™ i5-8365UE, DisplayPort++, HDMI, GbE LAN, and 5 USB
DSP501-527-i3-8145UE (P/N: E22K501104)	Digital signage player with Intel® Core™ i3-8145UE, DisplayPort++, HDMI, GbE LAN, and 5 USB
DSP501-527-4305UE (P/N: E22K501105)	Digital signage player with Intel® Celeron® 4305UE, DisplayPort++, HDMI, GbE LAN, and 5 USB
DSP501-i3-W (P/N: E22K501107)	Digital signage player with Intel® Core™ i3-8145UE, DisplayPort++, HDMI, GbE LAN, 5 USB, and wide temperature. from -40°C to 60°C
DSP501-CEL-W (P/N: E22K501108)	Digital signage player with Intel® Celeron® 4305UE, DisplayPort++, HDMI, GbE LAN, 5 USB, and wide temperature. from -40°C to 60°C

Optional	
DDR4 SO-DIMM	4GB - 32GB
Wireless LAN Kit	Wi-Fi module and antenna
Storage	M.2 Key M 2280 (SATA & NVMe)

## Dimensions

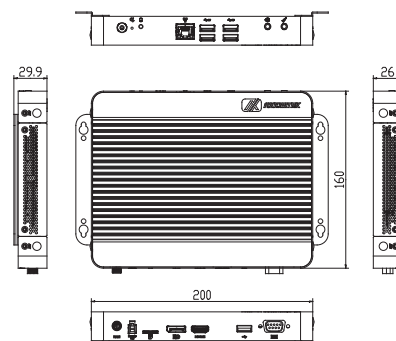



# Delmation

products



## Delmation Products

Blauw-roodlaan 300  
2718 SK Zoetermeer  
079 - 342 20 41

[www.delmation.nl](http://www.delmation.nl) | [info@delmation.nl](mailto:info@delmation.nl)